




MG BLINK 12-220



EC DECLARATION OF CONFIRMITY MEGERŐSÍTŐ NYILATKOZAT

We hereby declare that our product:
Ezennel kijelentjük, hogy termékünk:

MG-BLINK 12-220

is in compliance with Directive:
megfelel az irányelveknek:

**2011/65/EU - 2014/30/EU
2014/35/EU**

DESCRIPTION

Flashing warning lamp, indicating the movement of automatic doors and gates. The lamp is provided with an integrated antenna tuned at 433.92 MHz, to receive the remote signal of radio transmitters. Should a different reception frequency is required, use a tuned external antenna. Thanks to the LED technology, it offers a high brilliancy, a very reduced absorption (1W), a duration of around 100,000 operating hours, while reducing the maintenance operations.

INSTALLATION

The position of the flashing lamp must be near the gate and easily visible. The flashing lamp can be fixed on either a horizontal or a vertical surface. Remove the transparent cover. Remove the electronic circuit and fix it at the base of the flashing light. Fig. 1 shows fixing to pillar, Fig. 2 shows fixing onto a vertical surface.

Other fittings are not allowed.

WIRE CONNECTIONS

Connect the flashing lamp output of the control unit to the terminal strip M1 (Fig. 3). If the flashing lamp output is 24 VDC, no polarity must be followed. Connect the RG58 antenna cable to terminal strip M2. The external shield must be connected to terminal SHIELD, the signal cable should be connected to terminal ANT. The length of the antenna connecting cable should not exceed 5 m. Introduce the card in the special niche and close the flashing lamp again.

IMPORTANT: In order to avert any humidity leakages and condensate, seal the flashing lamp with the utmost care, by using a silicone-based product. Seal both the cable in the cable duct and the fitting base in the entry hole of the duct.

TECHNICAL DATA

Power supply: 12÷255 Vac 50/60 Hz | 14÷255 Vdc

Maximum power draw: 1 W

Operating temperature: -20°C / +50°C

Flashing frequency: 0,8 Hz

Protection level: IP44

Overall dimensions: 117 x 135 x 52 mm

LEÍRÁS

Automatikus ajtók és kapuk mozgását jelző villogó figyelmeztető lámpa. A lámpa beépített, 433,92 MHz-re hangolt antennával van ellátva, a rádióadók távjelének vételére.

Ha más vételi frekvenciára van szükség, használjon hangolt külső antennát. A LED-technológiának köszönhetően nagy fényerejű, nagyon alacsony fényelnyelésű (1W), kb. 100 000 üzemóra élettartamú, miközben csökkenti a karbantartási műveleteket.

BEÁLLÍTÁS

A villogó lámpa helyének a kapu közelében és jól látható helyen kell lennie. A villogó lámpa vízszintes vagy függőleges felületre is rögzíthető.

Távolítsa el az átlátszó fedelet. Vegye ki az elektronikus áramkört, és rögzítse a villogó lámpa aljára. Az 1. ábra az oszlopra történő rögzítést mutatja, A 2. ábra a függőleges felületre történő rögzítést mutatja.

Más rögzítés nem megengedett.

VEZETÉKCSATLAKOZÁSOK

Csatlakoztassa a vezérlőegység villogó lámpa kimenetét az M1 csatlakozószalagra (3. ábra). Ha a villogó lámpa kimenete 24 V egyenfeszültségű, nincs polaritás nem kell betartani. Csatlakoztassa az RG58 antennakábelt az M2 csatlakozócsikhoz. A külső árnyékolást a SHIELD terminálhoz kell csatlakoztatni, a jelkábelt az ANT terminálhoz kell csatlakoztatni. Az antenna csatlakozókábel hossza nem haladhatja meg az 5 m-t. Helyezze be a kártyát a speciális fülkébe, és zárja be ismét a villogó lámpát.

FONTOS: A nedvességszivárgás és a kondenzvíz elkerülése érdekében a villogó lámpát a lehető legnagyobb gondossággal, szilikonalapú termékkel zárja le. Tömítse le mind a kábelt a kábelcsatornában, mind a szerelvényalapot a csatorna bemeneti nyílásában.

TECHNIKAI ADATOK

Tápellátás: 12÷255 VAC 50/60 Hz | 14÷255 Vdc



Maximális teljesítményfelvétel: 1 W

Üzemi hőmérséklet: -20°C / +50°C



Villogási frekvencia: 0,8 Hz

Védelmi szint: IP44



Teljes méretek: 117 x 135 x 52 mm

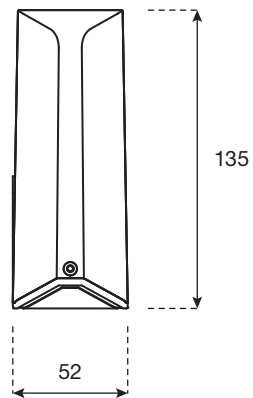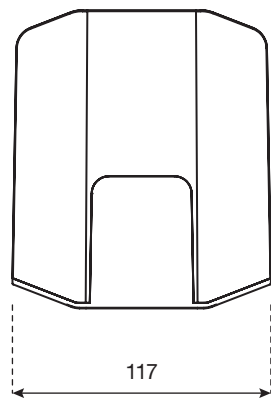

1

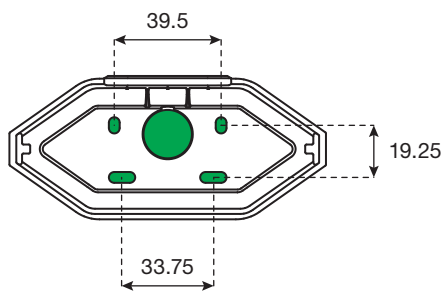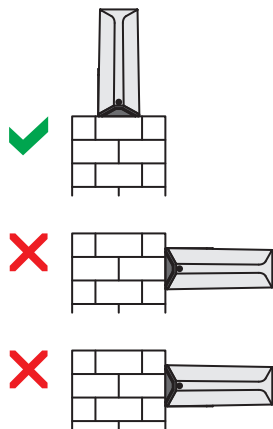

2



3

