

# Visual 344



Possible applications of accessories and operative devices near an automatic system

## Modular post to provide housing support.

Service post indicated to be used with road barriers and retractable bollards. It provides housing for command or safety accessories inside it.

Made of Fe steel, cataphoresis treated and varnished to **withstand atmospheric agents**.

It consists of **stackable modules**, and each of them is fitted with a lockable door to access the inside by coded key.

The upper module is fitted with a front panel made of aluminium, designed and made to be inserted with various command accessories (digipads, intercoms, proximity readers, etc.).

It is also possible to fit the top module with a traffic light with two or three LED lights.



Aluminium pannel fitted with digital pad, traffic lights and proximity reader




VISUAL 344 with a personalized intercom, in a car park for instance

## technical data

Material	Fe 360 steel
Thickness	4 mm
Panel material	Aluminium
Module diameter	Ø 275 mm
Height of base module	542 mm
Height of module supporting accessories	805 mm
Weight with 3 modules	70 kg
weight with 2 modules	50 kg
colour	RAL 7016 Anthracite Grey Cataphoresis treated
Protection standard	IP 53
impact resistance	5.000 J (500Kg force at 1 m height)

## OVERALL DIMENSIONS

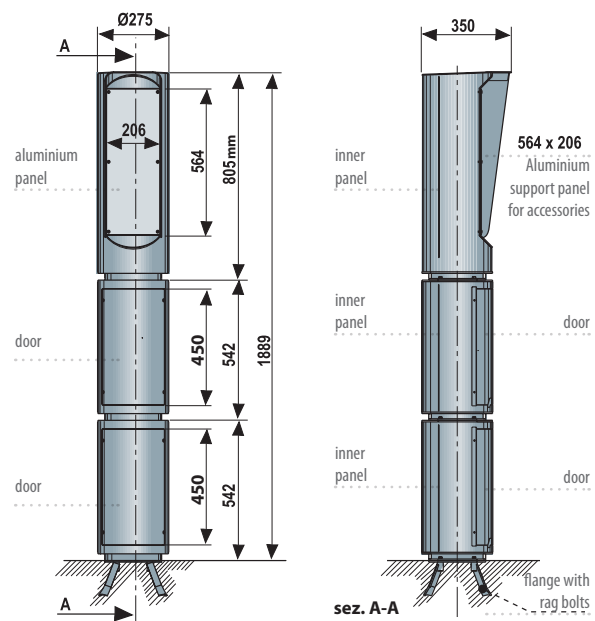





# Visual 344






Item code No.	Specifications	Modules			
	Height (m)	Code 3450L (quantity)	Code 3452L (quantity)	Code 3456L (quantity)	Code 3462L (quantity)
3446L	1,34	1	1	1	
3448L	1,88	1	1	2	
3460L	2,14	1	1	1	1

## MODULES FOR VISUAL 344

Item No.	Description	Height (m)
 3450L	Upper module with 1 panelled side	0,80
 3456L	Base module	0,54
 3462L	Intermediate module with 1 panelled side	0,80
 3466L	Upper module with two panelled sides	0,80

## SPECIFIC ACCESSORIES

Item No.	Description
 3452L	Flange with anchoring plates and fixing screws
 3457L	Base module cover
3214L (*)	LED traffic lights, 2 lights red-green, 24 V
3215L (*)	LED traffic lights, 2 lights red-green, 230 V
3216L (*)	LED traffic lights, 3 lights red-yellow-green, 24 V
3217L (*)	LED traffic lights, 3 lights red-yellow-green, 230 V
 60L	RAL colour change

(\*) only for applications with VISUAL 344.

for Sliding Gates

for Swinging Gates

for Industrial Doors

for Garage Doors

Oil-hydraulic Road Barriers

Oil-hydraulic Retractable Bollards

Steady and Manual Posts

Electronic Controllers

Command Accessories

Safety and Signalling Accessories

Radio Receivers and Transmitters

Kits

Complete Systems