PC25

control panel platform

VERSUS F30

control panel with frequency converter

Applicable to doors
industrial fast doors

jcmtechnologies

control panel platform

VERSUS F30

control panel with frequency converter

Industrial control panel with 0,75 kW / 4,2 A or 1,5 kW / 6,8 A frequency converter.
Control by JCM, Elektromaten or Kostal absolute encoder.
Designed for fast and rolling canvas doors.
KEE interface.

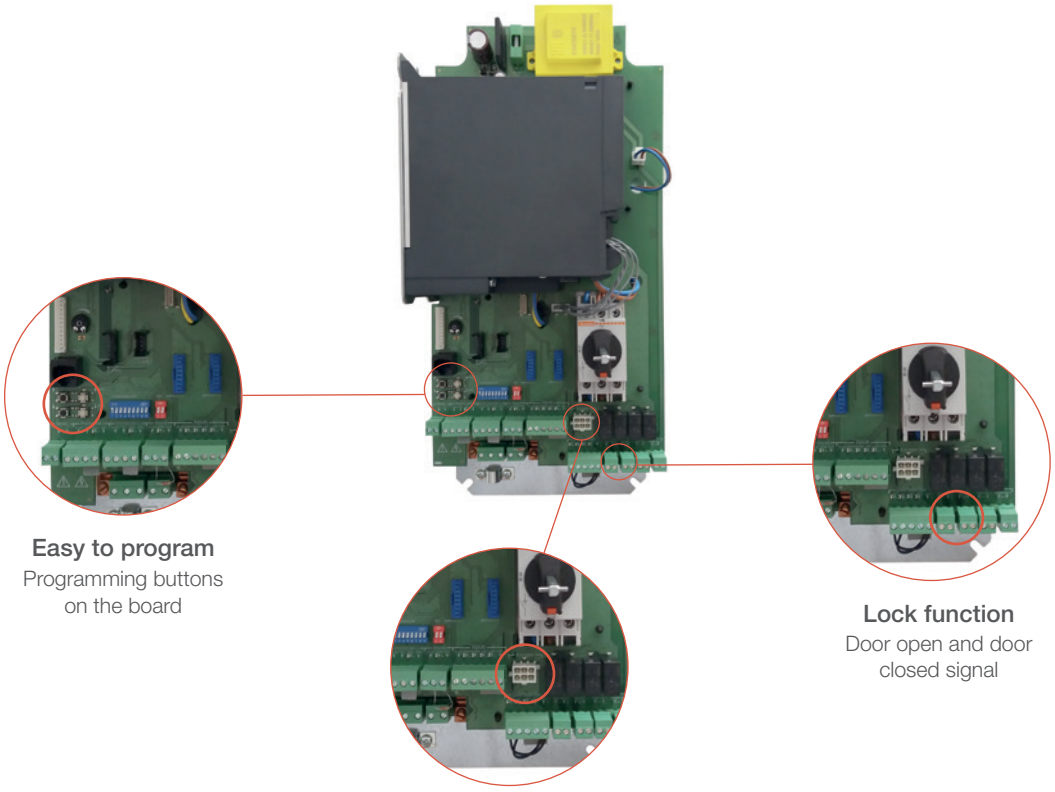

Easy to program
Programming buttons on the board

Lock function
Door open and door closed signal

Special connector for digital limit switches
Compatible with JCM, Elektromaten and Kostal absolute encoder

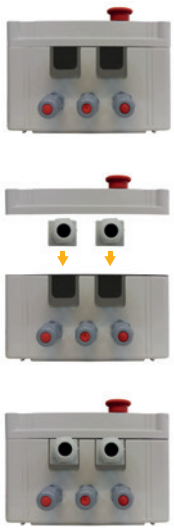

Extractable V cable glands
To aid in installing/replacing pre-wired accessories

Error indicator

LCD screen for settings and messages

Intuitive keypad
With backlit buttons: Information about the status of the equipment and the door at all times, indicating what action can be carried out next.

jcmtechnologies

control panel platform

VERSUS F30

control panel withfrequency converter

F30S075

F30L075 · F30L150

F30S075 · F30L075 · F30L150

1005259 1006249 1006188

- Industrial panel with 0,75KW or 1,5KW frequency converter and control by JCM, Elektromatenor Kostal absolute encoder.
- Motor brake and signal light outputs at 230 VAC and voltage-free contact outputs for door open and door closed status indication.
- One 24 VAC and two 24 VDC outputs for connecting photocells with auto-test or other accessories such as radar. The outputs provide a maximum of 700 mA between the three.
- Inputs for partial or total opening and closing push buttons.
- Inputs for limit switches, safety contacts, one safety edge and one stop.
- Connectors for external cards: STICK motion receiver, RSEC3 3G radio band receiver, TL-CARD-V traffic light card and MTC1 magnetic detector card.
- Size:
  F30S075: 400 x 200 x 132 mm. (0,75KW)
  F30L075: 400 x 300 x 132 mm. (0,75KW)
  F30L150: 400 x 300 x 187 mm. (1,5KW)

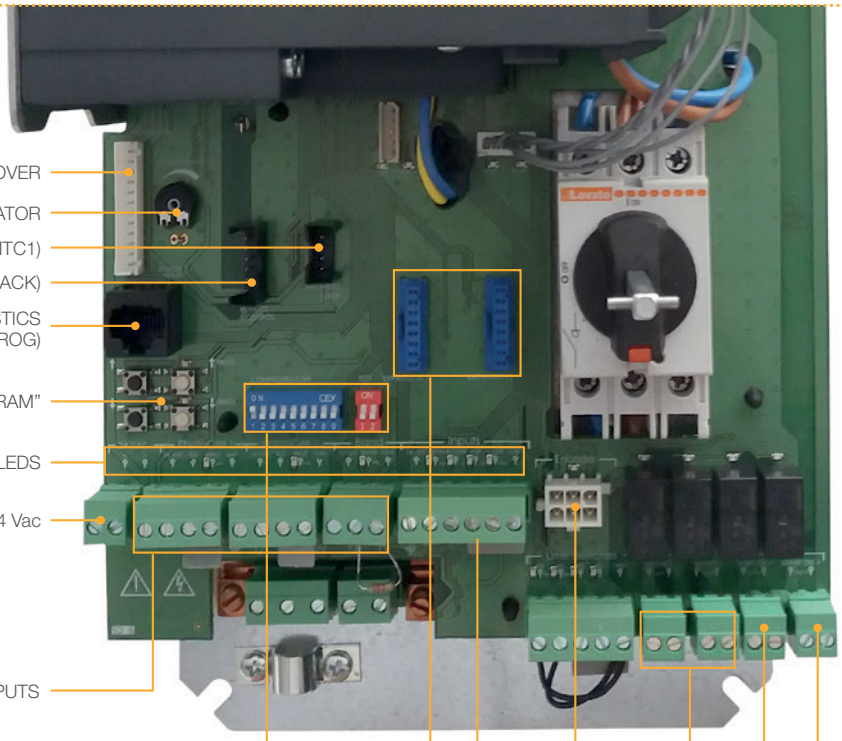

BUTTONS ON THE COVER

AUTO-CLOSE TIME REGULATOR

VEHICLE DETECTOR CONNECTOR (MTC1)

PLUGGABLE RECEIVING CONNECTOR (STICK/RACK)

CONNECTOR FOR FUNCTIONS AND DIAGNOSTICS PROGRAMMER (VERSUSPROG)

“EASY TO PROGRAM”

ACTIVE INPUTS/OUTPUTS INDICATOR LEDS

24 Vac

3 CONFIGURABLE INPUTS WITH 2 24VDC OUTPUTS

9+2 POSITION OPTIONS SELECTOR

2 CONNECTORS FOR FUNCTIONS EXPANSION CARD

3 BUTTON INPUT: OPEN-STOP-CLOSE

ENCODER: COMPATIBLE WITH ELEKTROMATEN, KOSTAL AND JCM

LOCK FUNCTION: DOOR OPEN/DOOR CLOSED

230V FLASHER

230V MOTOR BRAKE

jcmtechnologies

control panel platform

VERSUS F30

control panel with frequency converter

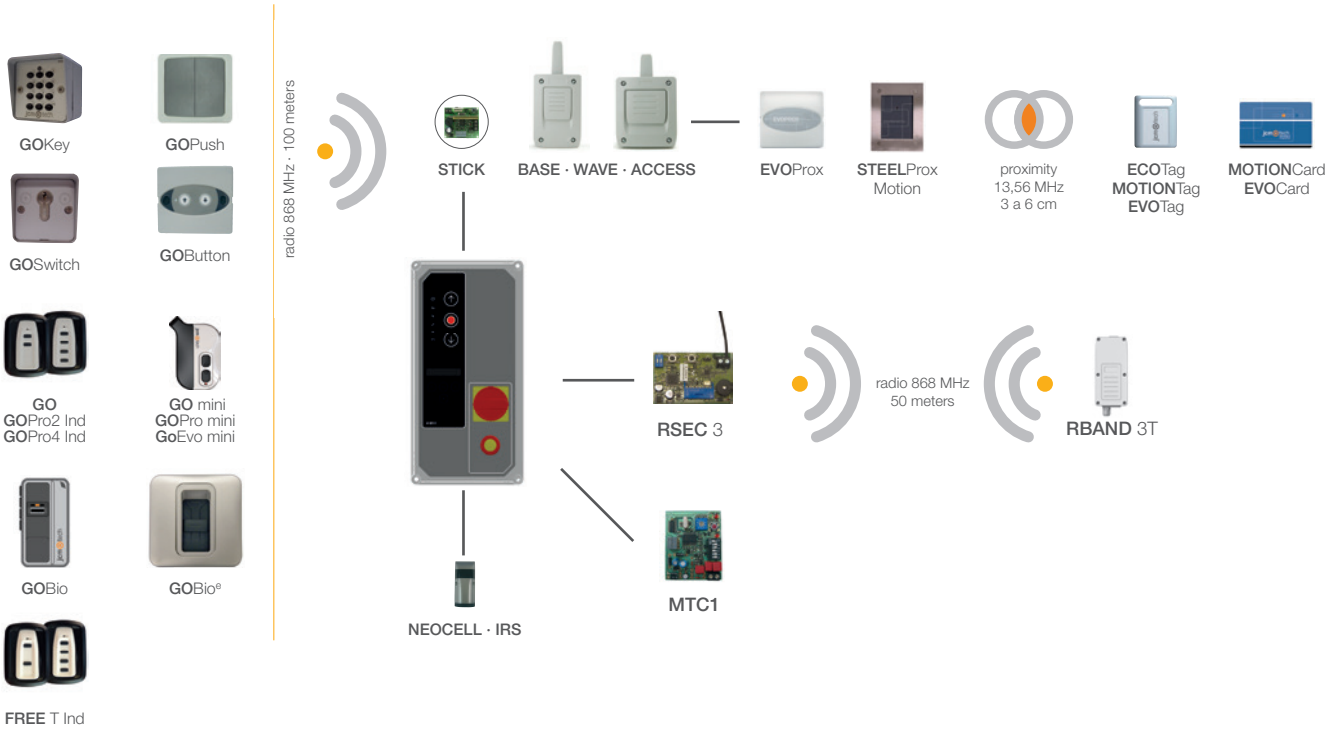

Application in industrial roller doors

VERSUS F30, **RBAND3**, **G-TRAFFIC, R-TRAFFIC** (Traffic lights) and **MTC1** (magnetic detector)

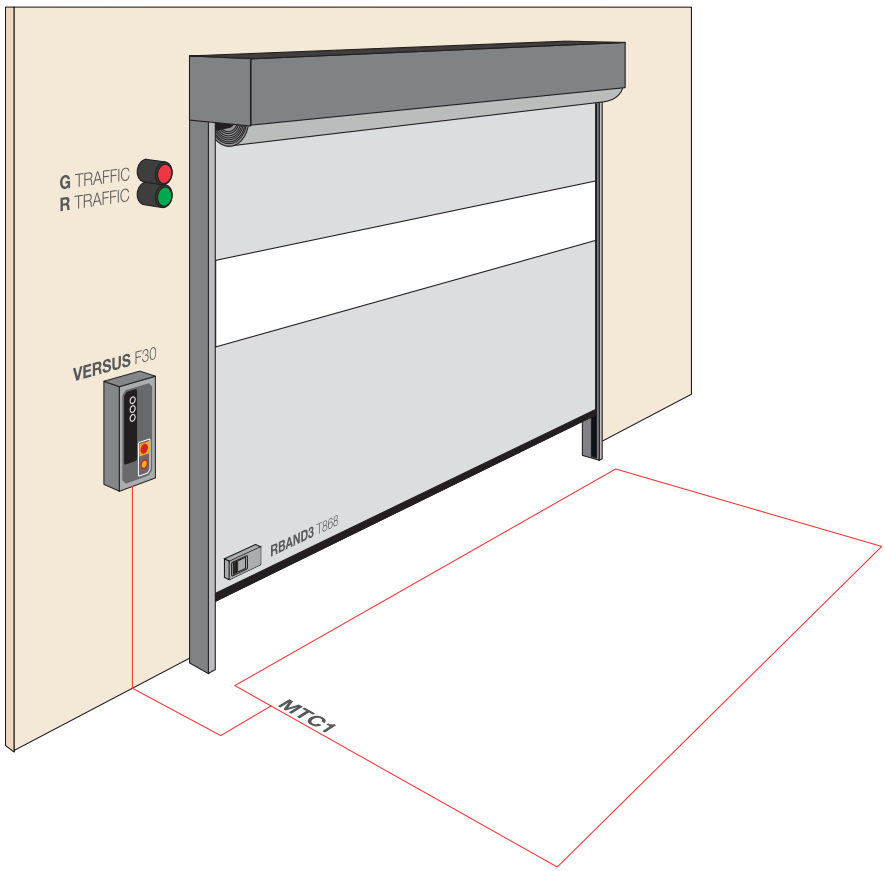

jcmtechnologies